




FA 20 302 02

P. 1 | 2

VORAS F2



FACTOR 2

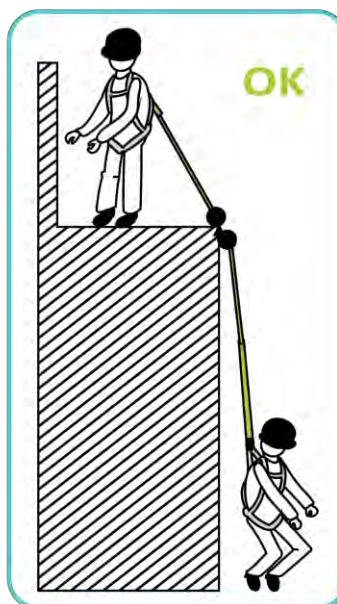

①



| |
|---|
| HS CODE |
| 84798997 |
| CARTON SIZE / PCS. |
| 60 x 40 x 24 cm / 10 |
| AET N°2777/10835-01/E12-02 |
| Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland |
| MODULE D FI14/14003.02 |
| SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland |

| | |
|-------------------|------------------------|
| REF. | FA 20 302 02 |
| LG. KG | 2.0 m |
| | EN 360:2002 |
| MAT. | PVC |
| | PA & PES 50 mm |
| | --- / FA 50 202 17 |
| | x1 |
| R(kN) | 15 kN |
| | NO |
| + | FACTOR 2 |
| | 1.35 KG |

| | | |
|--|--|---|
| LG. KG Longueur Poids maxi utilisateur Length Max. user weight Longitud Peso máximo del usuario Lunghezza Peso Max. dell'utente Länge Höchstgewicht des Benutzers | MAT. Matière carter / sangle Material of casing / webbing Material cárter / correa Material dei carter / Cinghia Material Gehäuse / Gurt | Matière connecteur haut / connecteur bas Material of top connector / bottom connector Material conector alto / conector bajo Materiale connettore alto / connettore basso Material oberes / unteres Verbindungselement |
| Nombre d'émerillons Number of swivels Cantidad de eslabones giratorios Numero di tornichetti Anzahl der Wirbel | Homologué pour le travail à proximité d'arêtes vives Approved for work near sharp edges Homologado para trabajo cerca de aristas vivas Omologato per lavoro in prossimità di spigoli vivi Zugelassen für Arbeiten in der Nähe scharfer Kanten | + Point fort Key feature Ventaja principal Punti forti Produktvorteil |